

Product type:

LR1200-T8-18W-A3









## **Features**


- Adopted the high quality light source Epistar 2835 chip, non isolated driver approved by EMC, Import program, emerald capacitor, to ensure the long life and high Stability.
- Eco-friendly product, No Mercury and other hazardous materials, recyclable relevant national policies.
- High thermal conductivity aluminum design, excellent heat dissipation, low light decay, long service life.
- Instant start, adapt to frequent switching occasion.
- Unique Driver design, more safe and energy saving.
- Uniform brightness, no therefore interference, no flickering or buzzing
- Thickening aluminum, 15mm wide plate design, no spare cables, no abnormal sound, high safety





## **Light Distribution Data**


► Distribution curve flux



► Typical Illuminance values Table (θ≈120°)

Model		Typical high illuminance values ( Lx )			
		1m	2m	3m	
Milky cover	Cool white light	330	83	37	

## **Product Dimension**

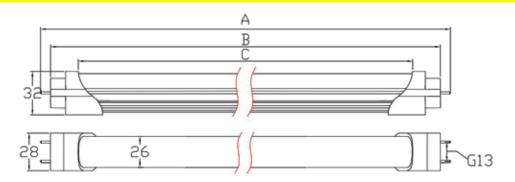


Total length A(mm)	Tube length B(mm)	Luminous surface C (mm)	Tube diameter D (mm)	Type of cap
1213	1198	1160	Ellipse 28*32	G13




## Installation

Product installation picture



Replace the traditional inductive T8 fluorescent lamp



▶ Replace the traditional electronic T8 fluorescent lamp

